


Flo-Well


Manufactured Dry Well

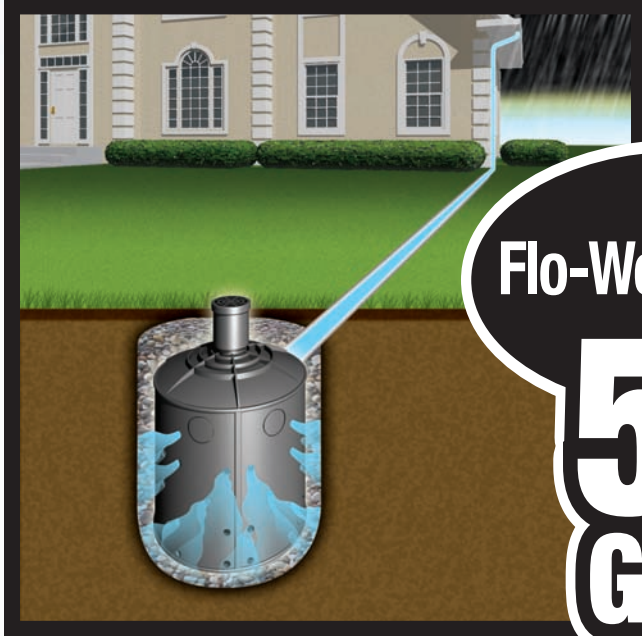

Flo-Well. HOLDS

**50
GAL.**

VERSUS

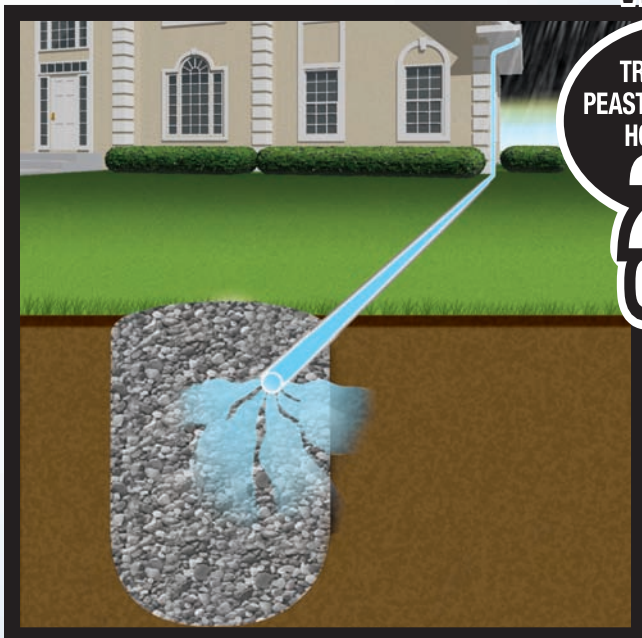

TRADITIONAL
PEASTONE DRYWELL
HOLDS ONLY


**20
GAL.**

LEED credits:
Make your
site green

Retains storm
water on-site

Less costly to
install than pipe
or concrete

Expands to
manage large
volumes of water

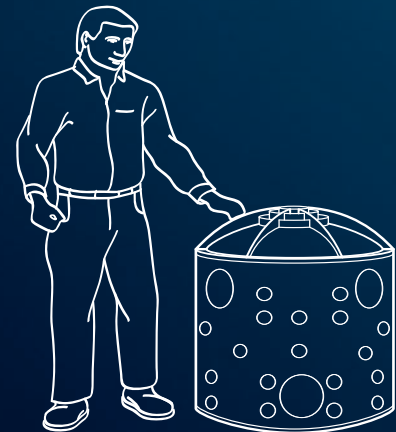

**WEST
CHESTER MACHINERY**

WEST CHESTER MACHINERY
278 Old LedgeWood Rd
Flanders, NJ 07836

Phone: (973) 347-1101
Fax: (973) 347-0064
WEB: www.WestChesterMachinery.com

 **NDS**TM
WE PUT WATER IN ITS PLACE

Flo-Well[®] Manufactured Dry Well

	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
	FWAS24	24" diam. x 28.75"H Flo-Well [®] Storm water leaching system Includes 3 side panels, 1 Top Component Fits 4" SCH-40 Pipe and 4" DWV Pipe	Black	1	25.15	10FW	NDS #FWAS24 structural foam polyolefin round drywell system with UV inhibitors. 24" dia., 28.75" high, 49 gal. with 18- 1.5" Knockout leaching ports and 3- 4.5" knockout inlet/outlet ports per panel.
	FWAS24C	24" diam. Flo-Well [®] Cover Use with #FWAS24	Black	2	8.00	10FW	NDS#FWAS24C structural foam polyolefin round drywell system cover with UV inhibitors. 24 1/4" dia., 4 5/8" height, 3/4" outer lip, 4.5" center knockout fits NDS #FWAS24, NDS #FWSPS3.
	FWSPS3	Flo-Well [®] Side Panels/ Extension Only Includes 3 side panels; makes 1 round drywell. Fits #FWAS24 (May also be used as a durable compost bin.)	Black	1	5.00	10FW	NDS #FWSPS3 structural foam polyolefin side panels with UV inhibitors with 18- 1 1/2" knockout leaching ports and 3- 4.5" knockout inlet/outlet ports per panel. 24" high with recessed .75" lip for firm stacking.
	FWBP24	24" diam. Flo-Well [®] Bottom Fits #FWAS24	Black	5	3.50	10FW	NDS #FWBP24 structural foam polyolefin round Flo-Well [®] bottom with UV inhibitors. 24" diameter with six 1 1/2" leaching ports. 4.5" center knockout for strut coupling.
	FWSD69	4" SCH40 Surface Drain Inlet with Grate Fits #FWAS24 and #FWAS24C ADA Compliant	Black	8	1.85	10FW	NDS #FWSD69 structural foam polyolefin 6" grate with 4" inlet with UV inhibitors. 6" Diameter at inlet. 9" high. 4.5" OD fits Sch. 40 PVC fittings.
	FWFF67	Porous Filter Fabric Wrap for Flo-Well [®] Use with #FWAS24	Black	20	0.35	10FW	7' long x 2' wide to surround Flo-Well [®] Drywell System. Non-woven fabric. Weight 1 oz. Mullen burst 175 psi. 200 GPM flow through.

WEST CHESTER MACHINERY
 WEST CHESTER MACHINERY
 278 Old Ledgewood Rd
 Flanders, NJ 07836
 Phone: (973) 347-1101
 Fax: (973) 347-0064
 WEB: www.WestChesterMachinery.com

NDS
 WE PUT WATER IN ITS PLACE

TOLL FREE 800-726-1994
 851 N. Harvard Ave. Lindsay, CA 93247
 www.NDSPRO.com